

Component List

(Senarai Komponen)

Bakery Mixer (Penggaul)

**BJY-BM60****BJY-BM60-60****BJY-BM60N****BJY-BM60N60**


Made in Malaysia
(Buatan Malaysia)

Thank you for purchasing BERJAYA product. Please read this service manual carefully before operating the product. Please keep this manual in a safe place for future reference. (Terima kasih kerana membeli produk BERJAYA. Sila baca manual penyelenggaraan dengan teliti sebelum menggunakan produk ini. Simpankan panduan operasi ini dengan selamat untuk rujukan masa depan.)

Contents (Kandungan) :-

- Installation (Pemasangan)	2
- Explosive Drawing (Rajah Terperinci)	2-6
- Component List (Senarai Komponen)	2-6
- Technical Data (Data Teknikal)	6
- Circuit Diagram (Rajah Litar)	6
- Warning (Amaran)	6
- Operation (Operasi)	7
- Cleaning (Pembersihan)	8
- User Maintenance (Penyelenggaraan)	8
- Memo (Memo)	9


1- EXPLOSIVE DRAWING (RAJAH TERPERINCI) - TOP COVER AND HANDCART

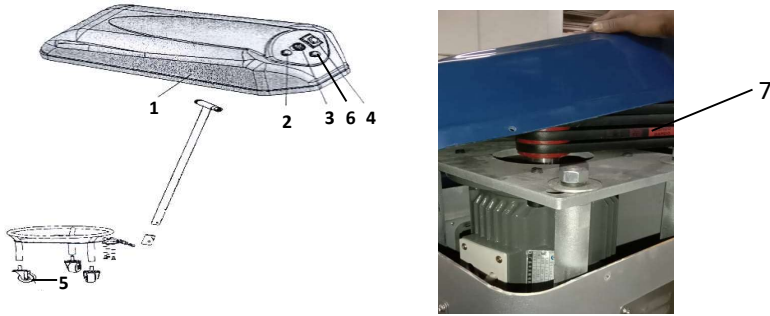

1- COMPONENTS LIST (SENARAI KOMPONEN) - TOP COVER AND HANDCART

No	Description (Butir-Butir)	Bar Code (Kod Balang)
1	Top Cover (Penutup Atas)	IC-BM60-TC
2	Green Start Switch (Suis Start Warna Hijau)	IC-BM60-GS
3	Stop Switch (Suis Stop)	IC-BM-SPS
4	Timer Relay 380VAC / 30 minutes (Penukur Masa 380VAC / 30 minit)	IC-BM60-TR30M
5	Foot Wheel (Roda)	IC-BM60-FW
6	Reset Switch - Yellow (Suis Reset - Kuning)	IC-BM60-RS
7	Belt SPA 1357LW (Tali SPA 1357LW)	IC-BM60-BELT


2- EXPLOSIVE DRAWING (RAJAH TERPERINCI) - CENTER AXLE

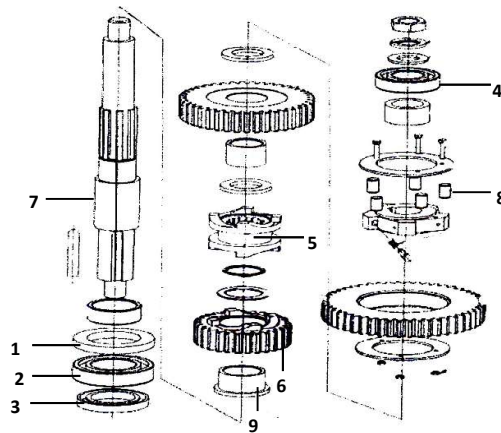

2- COMPONENTS LIST (SENARAI KOMPONEN) - CENTER AXLE

No	Description (Butir-Butir)	Bar Code (Kod Balang)
1	Oil Seal 60*90*10 (Legap Minyak 60*90*10)	IC-BM60-691OS
2	Bearing 6210 (Bearing 6210)	IC-BM-6210B
3	Oil Seal 50*80*10 (Legap Minyak 50*80*10)	IC-BM60-581OS
4	Bearing 6207 (Bearing 6207)	IC-BM-6207B
5	Coupling (Penyangkuk)	IC-BM60-C
6	High Speed Gear (Gear Kelajuan Tinggi)	IC-BM60-HSG
7	Centre Axle (Axe Tengah)	IC-BM60-2F5
8	Roller (Penggolek)	IC-BM60-2F21
9	High Speed Possessive Copper (Tembaga Posesif Kelajuan Tinggi)	IC-BM60-2F12


3- EXPLOSIVE DRAWING (RAJAH TERPERINCI) - LIFTER UNIT

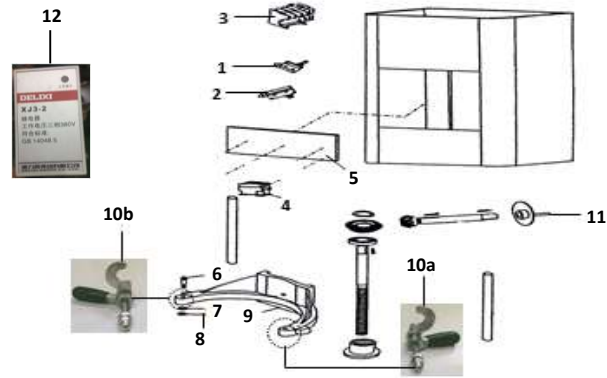

3- COMPONENTS LIST (SENARAI KOMPONEN) - LIFTER UNIT

No	Description (Butir-Butir)	Bar Code (Kod Balang)
1	Safety Covering Switch - 15A (Suis Penutup Keselamatan - 15A)	IC-BM-SCS
2	Fluctuate Safety Switch - 10A (Suis Penutup Naik Turun - 10A)	IC-BM-FSS
3	Overload Protection (Suis Beban Lampau)	IC-BM-OP
4	AC Contact Device (Alat Sentuhan AC)	IC-BM60-AC-CD
5	Board (Peraku)	IC-BM60-BOARD
6	Bolt (Bolt)	IC-BM60-BOLT
7	Washer (Gelang)	IC-BM60-WASH
8	Nut (Nut)	IC-BM60-NUT
9	Arm (Lengan)	IC-BM60-ARM
10a	Bowl Securing Slot - Right (Mangkuk Slot Melindungi - Kanan)	IC-BM60-BSS
10b	Bowl Securing Slot - Left (Mangkuk Slot Melindungi - Kiri)	IC-BM60-BSS-L
11	Hand Wheel (Pemegang Roda)	IC-BM60-7F16
12	Delixi Digital Time Relay	IC-BM60N-xj3-2


4- EXPLOSIVE DRAWING (RAJAH TERPERINCI) - TURNING PLATE AND MIXING PLATE

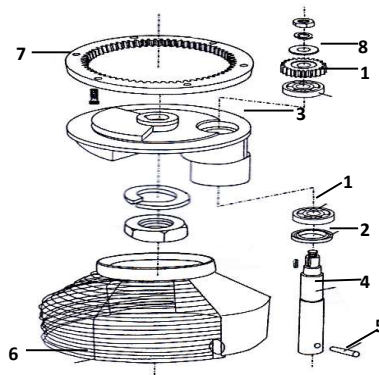

4- COMPONENTS LIST (SENARAI KOMPONEN) - TURNING PLATE AND MIXING PLATE

No	Description (Butir-Butir)	Bar Code (Kod Balang)
1	Bearing (Bearing)	IC-BM-6207B
2	Oil Seal (Lakri Minyak)	IC-BM60-OS
3	Turn Plate Protector (Plate Putaran Pelindung)	Without Netting IC-BM60-TPL
		With Netting IC-BM60N-TPL
4	Mixing Axle (Axe Pencampuran)	IC-BM60-MAXLE
5	Pin (Jarum)	IC-BM60-PIN
6	Safety Net (Jaring Keselamatan)	IC-BM60N-SN
7	Inner Gear (Gear Dalaman)	IC-BM60-IG
8	Planetary Gear (Gear Bintang)	IC-BM60-PG


5- EXPLOSIVE DRAWING (RAJAH TERPERINCI) - SPEED BLOCK

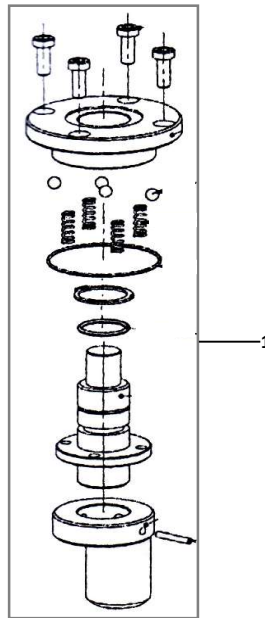

5- COMPONENTS LIST (SENARAI KOMPONEN) - SPEED BLOCK

No	Description (Butir-Butir)	Bar Code (Kod Balang)
1	Speed Block - Set (Blok Kelajuan) - Set	IC-BM60-SB-5


6- EXPLOSIVE DRAWING (RAJAH TERPERINCI) - GEAR AXLE

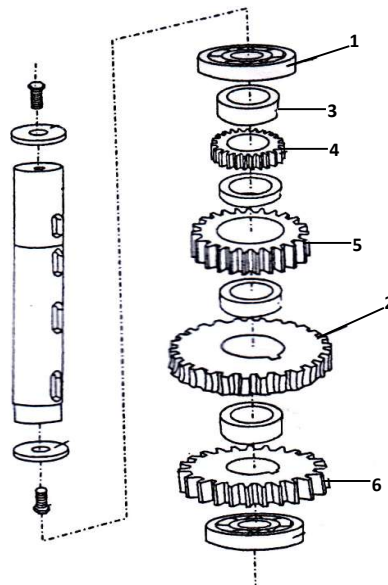

6- COMPONENTS LIST (SENARAI KOMPONEN) - GEAR AXLE

No	Description (Butir-Butir)	Bar Code (Kod Balang)
1	Bearing 80207 (Bearing 80207)	IC-BM60-B
2	Copper Drive Gear (Gear Pacuan Kuprum)	IC-BM60-CDG
3	Sleeve (Lengan)	IC-BM60-3F3
4	Small Gear (Gear Kecil)	IC-BM60-3F4
5	Medium Gear (Gear Tengah)	IC-BM60-3F6
6	Big Gear (Gear Besar)	IC-BM60-3F10


7- EXPLOSIVE DRAWING (RAJAH TERPERINCI) - MOTOR

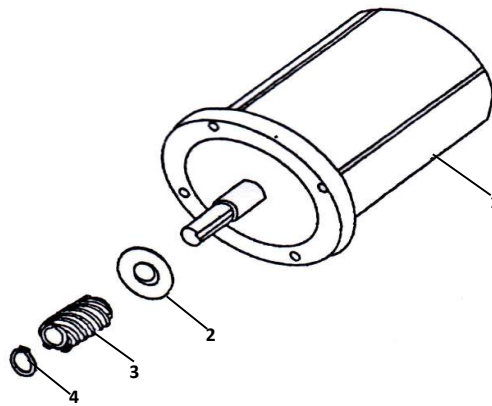

7- COMPONENTS LIST (SENARAI KOMPONEN) - MOTOR

No	Description (Butir-Butir)	Bar Code (Kod Balang)
1	Motor 2.2Kw / 50Hz (Motor 2.2Kw / 50Hz)	IC-BM-MT2.2
2	Oil Seal (Lakri Minyak) - 30 x 72 x 12mm	IC-BM-OS
3	Spiral Rod (Rod Spiral)	IC-BM60-SPR
4	Stop Ring (Gelang Penahan)	IC-BM60-SR


8- EXPLOSIVE DRAWING (RAJAH TERPERINCI) - FORK & STAND

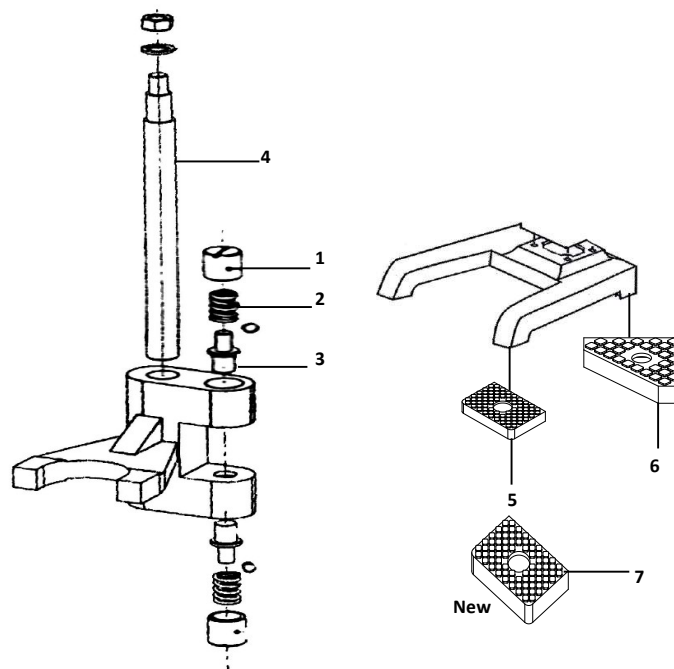

8- COMPONENTS LIST (SENARAI KOMPONEN) - FORK & STAND

No	Description (Butir-Butir)	Bar Code (Kod Balang)
1	Fork Nut (Nut Garpu)	IC-BM60-FN
2	Spring (Spring)	IC-BM60-SP
3	Fork Small Axle (Garpu Berputar Kecil)	IC-BM60-FSA
4	Fork (Garpu)	IC-BM60-FORK
5	Square Pad (Pad Segi Empat) - 1 Set = 2 Pieces	IC-BM60-S-PAD
6	Triangle Pad (Pad Segi Tiga) - 1 Set = 2 Pieces	IC-BM60-T-PAD
7	Rectangle Pad - New (Pad Persegi Panjang - Baru) - 1 Set = 2 Pieces	IC-BM60-R-PAD

9- EXPLOSIVE DRAWING (RAJAH TERPERINCI) - STANDARD ACCESSORIES

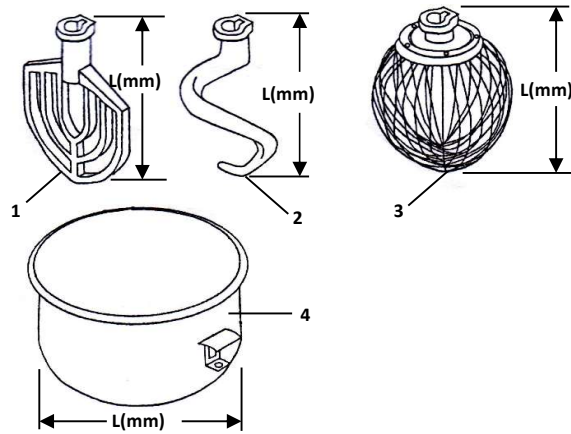

9- COMPONENTS LIST (SENARAI KOMPONEN) - STANDARD ACCESSORIES

No	Description (Butir-Butir)	Bar Code (Kod Balang)
1	Flat Beater 505mm (Pengacau Kaket 505mm)	IC-BM-60L-B
2	Dough Hook 505mm (Pengacau Takuk 505mm)	IC-BM-60WH
3	Wire Whisk 505mm (Pengacau Berjaring 505mm)	IC-BM-W60L
4	Bowl 465mm (Mangkuk 465mm)	IC-BM-B60L

MEMO (MEMO)

Please fill in the following at the purchasing time for future service reference.
(Sila isikan jadual yang berikut untuk rujukan perkhidmatan lepas jualan.)

Model Number (Nombor Model) :	
Purchasing Date (Tarikh Pembelian) :	
Dealer's Name (Nama Pengekar) :	
Address (Alamat) :	
Contact Number (Nombor Telefon) :	Home (Rumah) : Handphone (Telefon Bimbit) :
Comment (Komen) :	

The manufacturer reserves the right to change in design, equipment and technical features at any time. Accordingly, no claims based on data, illustration or descriptions in this operation manual will be admitted. English version is to be referred for any ambiguity.

(Pengilang berhak untuk membuat perubahan pada reka bentuk, peralatan dan ciri teknikal pada bila-bila masa. Oleh itu, sebarang tuntutan berdasarkan data, ilustrasi atau penerangan dalam manual operasi ini tidak akan diterima. Versi Bahasa Inggeris hendaklah dirujuk sekiranya terdapat sebarang kekeliruan.)

This operation manual is for usage guideline. The technical data details and usage instructions are given with our best knowledge of product and with good faith. It should not bind the sales agent or manufacturer to attendance in court or to appear in any enquiry before any government or statutory bodies.

(Manual operasi ini adalah untuk panduan penggunaan. Butiran data teknikal dan arahan penggunaan diberikan berdasarkan pengetahuan terbaik kami mengenai produk dan dengan niat yang baik. Ia tidak seharusnya mengikat ejen jualan atau pengilang